

Gas Detector with Signal Converter

SD-3RI Series SPECIFICATION

Model		SD-3RI	SD-3DRI
Detection principle		Non-dispersive infrared type	
Detection gas ^{*1}		Combustible gas and toxic gas	
Display		7-segment LED (5 digits), 3-color lamp (red, green, yellow)	
Detection range ^{*1}		Depends on sensor specifications	
Alarm set points ^{*1}		Depends on sensor specifications	
Sampling method		Diffusion type	Suction type (pour into by external unit)
Setting flow rate		—	0.4 – 1.5 L/min
Power supply indication		Power lamp lit (green)	
Gas alarm	Alarm type	Two-step alarm (H-HH)	
	Indication	Alarm lamp lit (red)	
	Reset type ^{*1}	Auto reset or self-latching	
Fault alarm	Self-diagnosis	System abnormality (E-9), sensor abnormality (E-1)	
	Indication	Fault lamp lit (yellow), error code display	
	Reset type	System abnormality: Self-latching Sensor abnormality: Auto reset (self-latching if sensor is disconnected)	
Warnings	Self-diagnosis	Sensor life assessment, clock abnormality diagnosis, communication diagnosis, sensor warning	
	Display	Blinking display alternating between gas concentration and error code	
	Operation	Same as normal operation	
Functions		Alarm delay, suppression, HART communication (HART7)	
External output ^{*1}		Gas concentration signal (4-20 mA DC with HART output), contact output (optional)	
Gas concentration signal	Transmission Method	3-wire analog transmission (common power supply <power supply, signal, common>) or 2-wire analog transmission (current source)	
	Transmission Specifications	4-20 mA DC (non-insulated linear output) Maximum load resistance 600 Ω (with derating depending on power supply voltage) Resolution: max. 2000 divisions (depending on specifications)	
	Transmission cable ^{*2}	Shielded cable 1.25 sq (1.308 mm ² /AWG16) or 2.0 sq (2.08 mm ² /AWG14) (same as power supply cable)	
	Transmission Distance ^{*7}	For 1.25 sq (1.308 mm ² /AWG16): Not exceeding 1.25 km For 2.0 sq (2.08 mm ² /AWG14): Not exceeding 2 km (with derating depending on supply voltage)	
Alarm contact (Optional) ^{*1}		SPDT (× 3): 2 alarms, 1 fault output, non-exciting at normal (exciting at alarm) or exciting at normal (non-exciting at alarm), 250 V AC, 2 A; 30 V DC, 1 A (resistance load), Minimum load 5V DC, 0.1A	
Power supply	Input voltage range ^{*3}	24 V DC (18 V – 30 V DC)	
	Power supply cable ^{*2*7}	Shielded cable 1.25 sq (1.308 mm ² /AWG16) or 2.0 sq (2.08 mm ² /AWG14) (same as transmission cable)	
	Power consumption	Max. 3.8 W	
Housing	Material	Stainless steel: SCS14 (equivalent to SUS316)	
	Cable connectors ^{*1}	ATEX/IECEX/UKEX: M25×1.5, conversion adapter (optional): NPT3/4, NPT1/2, M20×1.5 Japan Ex: Flame proof packing method <M20×1.5> (Compatible cables φ6.0~12.0mm), <M25×1.5> (Compatible cables φ12.0~16.0mm)	
	Tube connecting port	—	NPT1/4 (with SUS elbow union for 0.0φ8-1t)
	Degrees of protection	Equivalent to IP66/67	
	Installation type ^{*1}	Wall mounting (standard)/2B pole mounting (optional)	
	External dimensions ^{*5}	Approx. 171(W) × 277(H) × 127(D) mm (excluding projections)	Approx. 171(W) × 289(H) × 127(D) mm (excluding projections)
	Weight ^{*5}	Approx. 6.7 kg	Approx. 7.0 kg
Operating temperature range ^{*4}		ATEX/IECEX/UKEX: -40 °C – +70 °C (no sudden changes) Japan Ex: -20 °C – +70 °C (no sudden changes)	
Operating humidity range ^{*4}		0 %RH – 95 %RH (no condensation)	
Operation method		Dedicated magnet control key	
Type of protection		Flameproof construction	
Explosion-proof approvals	ATEX/UKEX	II 2G Ex db IIC T6/T5 Gb, -50°C ≤ Ta ≤ +60°C/+70°C (when lightning arrester is not installed), -40°C ≤ Ta ≤ +60°C/+70°C (when lightning arrester is installed)	
	IECEX	Ex db IIC T6/T5 Gb, -50°C ≤ Ta ≤ +60°C/+70°C (when lightning arrester is not installed), -40°C ≤ Ta ≤ +60°C/+70°C (when lightning arrester is installed)	
	Japan Ex	Ex db IIC T5 Gb, -20°C ≤ Ta ≤ +70°C	
Functional safety (IEC61508:2010) ^{*6}		SIL2 capable (HFT=0), SIL3 capable (HFT=1) with redundancy	
Certification		CE Marking, UKCA Marking	

*1 Please specify your request when ordering.

*2 To ensure explosion protection, use a cable designed for use in temperatures at least 5 °C above the maximum anticipated ambient temperature.

*3 Use a power supply capable of minimum temporary output of 2.5 A to ensure that fuses blow normally in the event of a product abnormality.

*4 In accordance with sensor specifications if restrictions apply due to sensor specifications.


*5 External dimensions and weight exclude cable gland.

*6 External units used in combination with SD-3DRI should be selected from SIL certified products.

*7 Depends on the type of cable.


Dimensional drawings (Excluding cable gland)

<Diffusion type>

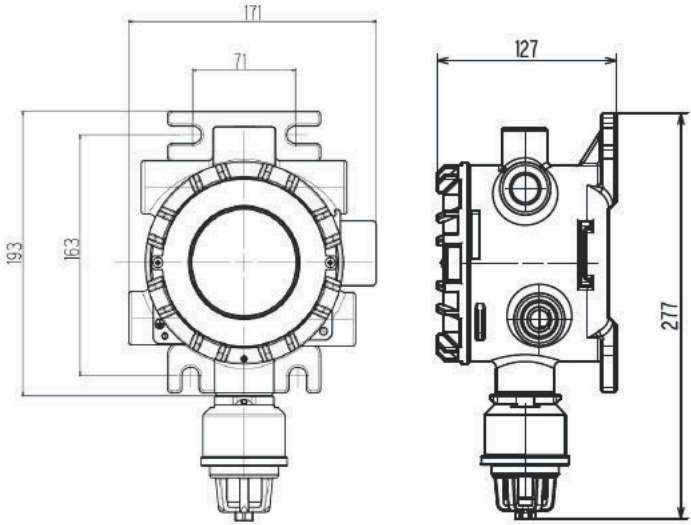

<Suction type>

* Pour into by external unit

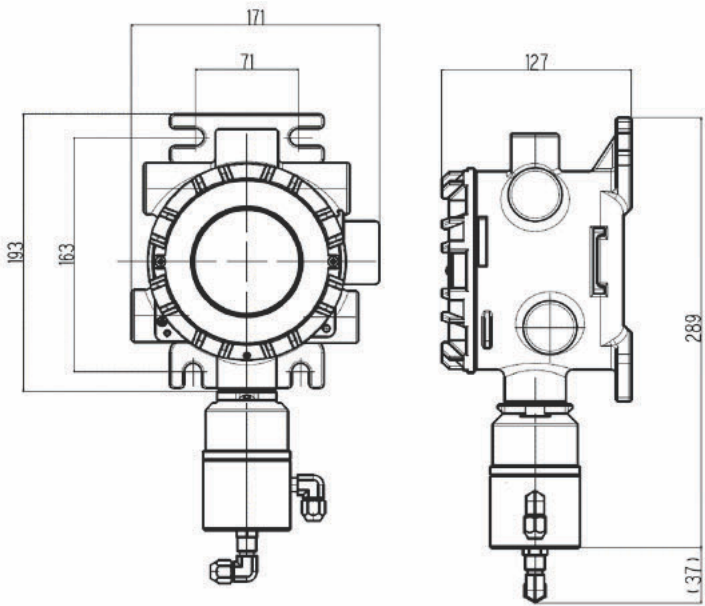

Terminal Block Diagram

<Using 3-core cable>

Terminal No.	Power/signal cable connection	
1	Power supply (+)	24 V DC
2	Common (Power supply (-), signal (-))	
3	Signal (+)	4-20 mA with HART
4	Not used	

<Using 4-core cable>

Terminal No.	Power/signal cable connection	
1	Power supply (+)	24 V DC
2	Power supply (-)	
3	Signal (+)	4-20 mA with HART
4	Signal (-)	

<Contact output (Optional)>

Relay1 (ALARM1)

Terminal No.	Cable connection
1	N. O.
2	Common
3	N. C.

Relay2 (ALARM2)

Terminal No.	Cable connection
1	N. O.
2	Common
3	N. C.

Relay3 (FAULT)

Terminal No.	Cable connection
1	N. O.
2	Common
3	N. C.

N. O. : Normal Open

N. C. : Normal Close


Methane (CH₄) Sensor

Specification Sheet



Applicable products	SD-3RI, SD-3DRI, GD-3RI
Part No.	6201 02
Model	IRF-1301
Detection principle	Non-dispersive infrared absorption type (infrared type)
Detection gas	Methane (CH ₄)
Detection range	0-100.0 %LEL
Digit	0.5 %LEL
Alarm setpoint [standard]	1st 25.0 %LEL, 2nd 50.0 %LEL
Alarm setpoint limits	10.0-60.0 %LEL
Accuracy	±2.0 %LEL (Typical)
Response time	T50 11 sec (Typical), T90 25 sec (Typical)
Repeatability	±1.0 %LEL (Typical)
Zero drift	±1.5 %LEL/6 months (Typical)
Lower detectable limit (LDL)	5.0 %LEL
Calibration gas	Methane (CH ₄)
Warm-up time	60 sec
Sensor life	> 5 years
Operating temperature	-40 °C to +70 °C (no sudden changes)
Operating humidity	0 to 95 %RH (non-condensing)
Operating pressure	80 kPa to 120 kPa (no sudden changes)
Storage conditions	Temperature range : -10 °C to +40 °C Humidity range : 0 to 90 %RH Pressure range : 80 kPa to 120 kPa Other conditions : The sensor must be stored in the specified packing case. Store in a location away from direct sunlight. Store in an environment free of corrosive gas, vibration, and dust. Avoid condensation and moisture.
Storage period	6 months (from the date of delivery)
External dimensions	Approx. 30(W) × 31(H) × 30(D) mm
Weight	Approx. 15 g
Remarks	<ul style="list-style-type: none"> The sensor data listed are typical values in an ideal test environment; actual measured values may vary depending on the installation environment and the sampling conditions employed. There is interference with other hydrocarbon gases.

<Outline Drawings>

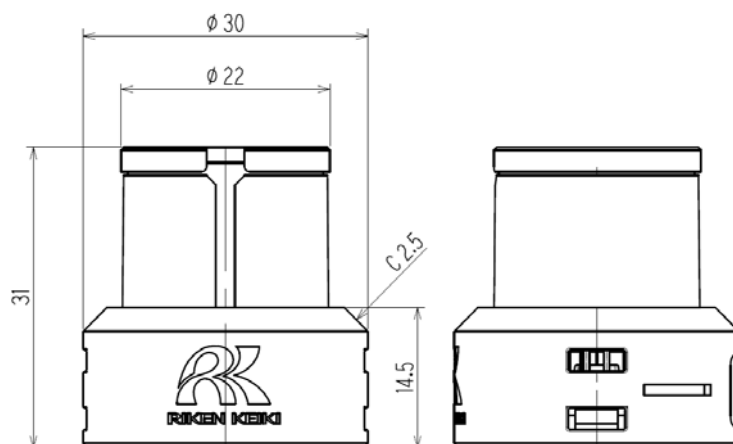

RIKEN KEIKI Co., Ltd.

2-7-6 Azusawa, Itabashi-ku, Tokyo 174-8744, Japan
Phone : +81-3-3966-1113
Telefax : +81-3-3558-9110
E-mail : intdept@rikenkeiki.co.jp
Web : <https://www.rikenkeiki.co.jp/english>

*Your direct contact:



RIKEN VIET
GAS DETECTOR TECHNOLOGY CO., LTD
ISO/IEC 17025:2017 (VLAC 1.0271)

Tel (+84) 28 3526 2986
Email info@rikenviet.vn
Web <https://rikenviet.vn>



Hotline
(+84) 961 55 69 05
Scan code to contact
(Zalo, WhatsApp, LinkedIn,...)


Isobutane (i-C₄H₁₀) Sensor

Specification Sheet



Applicable products	SD-3RI、SD-3DRI、GD-3RI
Part No.	6212 03
Model	IRF-1303
Detection principle	Non-dispersive infrared absorption type (infrared type)
Detection gas	Isobutane (i-C ₄ H ₁₀)
Detection range	0-100.0 %LEL
Digit	0.5 %LEL
Alarm setpoint 【standard】	1st 25.0 %LEL、 2nd 50.0 %LEL
Alarm setpoint limits	10.0-60.0 %LEL
Accuracy	±1.0 %LEL (Typical)
Response time	T50 11 sec (Typical), T90 28 sec (Typical)
Repeatability	±0.5 %LEL (Typical)
Zero drift	±0.5 %LEL/6 months (Typical)
Lower detectable limit (LDL)	5.0 %LEL
Calibration gas	Isobutane (i-C ₄ H ₁₀)
Warm-up time	60 sec
Sensor life	> 5 years
Operating temperature	-40 °C to +70 °C (no sudden changes)
Operating humidity	0 to 95 %RH (non-condensing)
Operating pressure	80 kPa to 120 kPa (no sudden changes)
Storage conditions	Temperature range : -10 °C to +40 °C Humidity range : 0 to 90 %RH Pressure range : 80 kPa to 120 kPa Other conditions : The sensor must be stored in the specified packing case. Store in a location away from direct sunlight. Store in an environment free of corrosive gas, vibration, and dust. Avoid condensation and moisture.
Storage period	6 months (from the date of delivery)
External dimensions	Approx. 30(W) × 31(H) × 30(D) mm
Weight	Approx. 15 g
Remarks	<ul style="list-style-type: none"> • The sensor data listed are typical values in an ideal test environment; actual measured values may vary depending on the installation environment and the sampling conditions employed. • There is interference with other hydrocarbon gases.

<Outline Drawings>

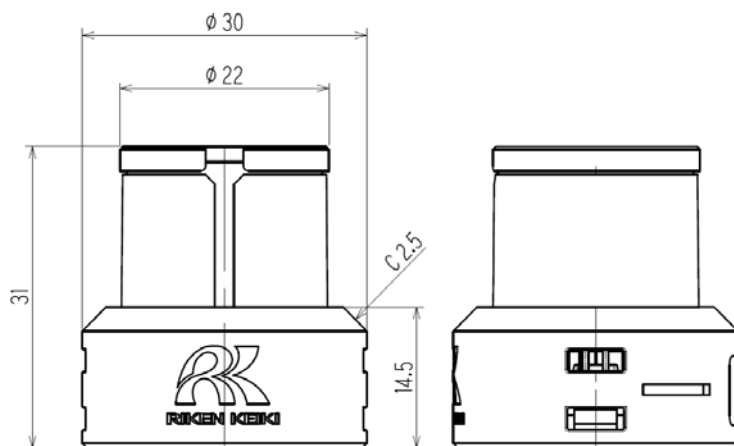

RIKEN KEIKI Co., Ltd.

2-7-6 Azusawa, Itabashi-ku, Tokyo 174-8744, Japan

Phone : +81-3-3966-1113

Telefax : +81-3-3558-9110

E-mail : intdept@rikenkeiki.co.jp

Web : <https://www.rikenkeiki.co.jp/english>

*Your direct contact:



RIKEN VIET
GAS DETECTOR TECHNOLOGY CO., LTD

ISO/IEC 17025:2017 (VLAC 1.0271)

Tel (+84) 28 3526 2986
Email info@rikenviet.vn
Web <https://rikenviet.vn>



Hotline
(+84) 961 55 69 05
Scan code to contact
(Zalo, WhatsApp, LinkedIn,...)


Propane (C₃H₈) Sensor

Specification Sheet



Applicable products	SD-3RI, SD-3DRI, GD-3RI
Part No.	6212 02
Model	IRF-1317
Detection principle	Non-dispersive infrared absorption type (infrared type)
Detection gas	Propane (C ₃ H ₈)
Detection range	0-100.0 %LEL
Digit	0.5 %LEL
Alarm setpoint [standard]	1st 25.0 %LEL, 2nd 50.0 %LEL
Alarm setpoint limits	10.0-60.0 %LEL
Accuracy	±2.0 %LEL (Typical)
Response time	T50 11 sec (Typical), T90 25 sec (Typical)
Repeatability	±0.5 %LEL (Typical)
Zero drift	±0.5 %LEL/6 months (Typical)
Lower detectable limit (LDL)	5.0 %LEL
Calibration gas	Propane (C ₃ H ₈), Alternative calibration gas : Isobutane (i-C ₄ H ₁₀)
Warm-up time	60 sec
Sensor life	> 5 years
Operating temperature	-40 °C to +70 °C (no sudden changes)
Operating humidity	0 to 95 %RH (non-condensing)
Operating pressure	80 kPa to 120 kPa (no sudden changes)
Storage conditions	Temperature range : -10 °C to +40 °C Humidity range : 0 to 90 %RH Pressure range : 80 kPa to 120 kPa Other conditions : The sensor must be stored in the specified packing case. Store in a location away from direct sunlight. Store in an environment free of corrosive gas, vibration, and dust. Avoid condensation and moisture.
Storage period	6 months (from the date of delivery)
External dimensions	Approx. 30(W) × 31(H) × 30(D) mm
Weight	Approx. 15 g
Remarks	<ul style="list-style-type: none"> The sensor data listed are typical values in an ideal test environment; actual measured values may vary depending on the installation environment and the sampling conditions employed. There is interference with other hydrocarbon gases.

<Outline Drawings>

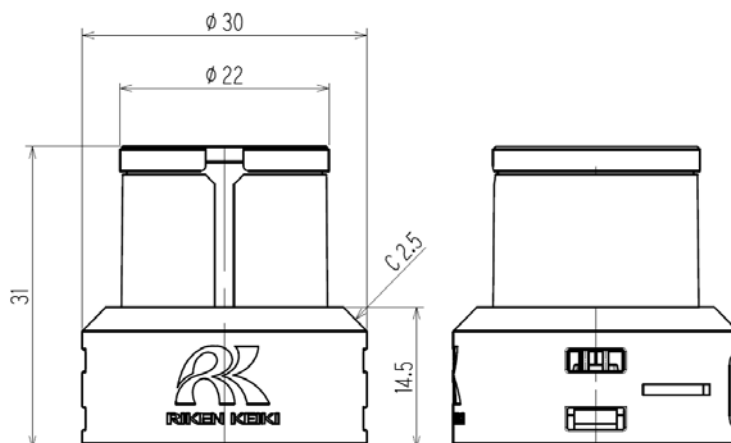

RIKEN KEIKI Co.,Ltd.

2-7-6 Azusawa, Itabashi-ku, Tokyo 174-8744, Japan
Phone : +81-3-3966-1113
Telefax : +81-3-3558-9110
E-mail : intdept@rikenkeiki.co.jp
Web : <https://www.rikenkeiki.co.jp/english>

*Your direct contact:



RIKEN VIET
GAS DETECTOR TECHNOLOGY CO., LTD
ISO/IEC 17025:2017 (VLAC 1.0271)

Tel (+84) 28 3526 2986
Email info@rikenviet.vn
Web <https://rikenviet.vn>



Hotline
(+84) 961 55 69 05
Scan code to contact
(Zalo, WhatsApp, LinkedIn,...)